# SERCO VALTER TKH
# ROLLER BUCKET SPREADER

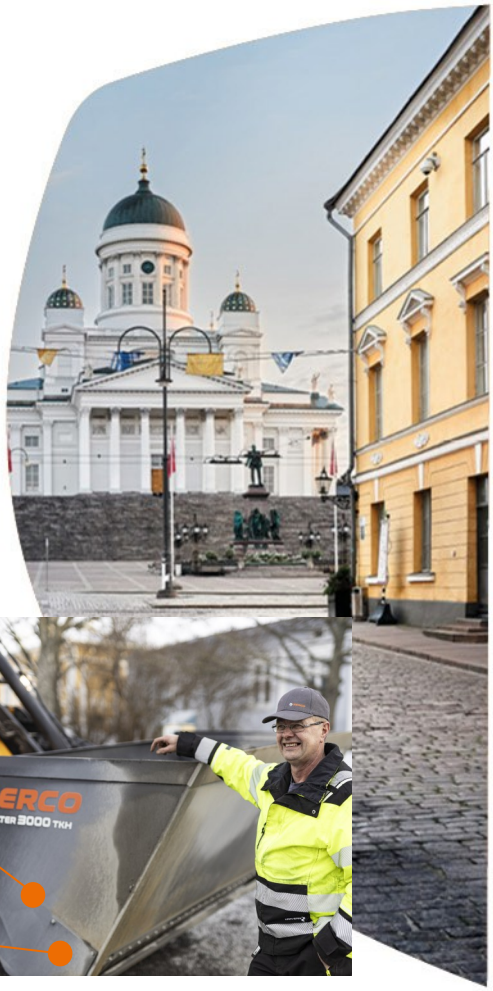

## Reliable crushing spreader!

- The Valter TKH Roller Bucket Spreaders come in seven size classes
- Hydraulically operated, manually adjustable rotation speed
    - The spreading capacity is adjusted from the flow control valve on the side of the machine, or if the oil flow of the base machine can be adjusted, the capacity can also be adjusted from the cab
- Crusher rotor and grille as standard
- Hydraulic requirements: pressure and return connection
    - Oil flow max. 100 l/min
- Suited for all spreading materials. Intended for spreading 0–8 mm grit but the maximum particle size is 16 mm.
- Hydraulic couplings and quick coupler included in the price




**Crusher rotor as standard**

**No blockages!** A multi-spring system enables even large, frozen chunks or stones to pass through the spreader without impacting the spreading result.

| MODEL | Product number | Capacity | Weight | Full width | Working width | Attachment | Base machine weight |
|---|---|---|---|---|---|---|---|
| Valter 500TKH | 605563 | 500 l | 400 kg * | 1750 mm | 1500 mm | Bolt-on quick attachment | Min. 3 t |
| Valter 700TKH | 605564 | 700 l | 450 kg * | 1750 mm | 1500 mm | Bolt-on quick attachment | Min. 4 t |
| Valter 1000TKH | 605565 | 1000 l | 520 kg * | 2050 mm | 1800 mm | Bolt-on quick attachment | Min. 5 t |
| Valter 1250TKH | 606144 | 1250 l | 580 kg * | 2250 mm | 2000 mm | Bolt-on quick attachment | Min. 6 t |
| Valter 1500TKH | 605566 | 1500 l | 620 kg * | 2250 mm | 2000 mm | Bolt-on quick attachment | Min. 7 t |
| Valter 2000TKH | 605567 | 2000 l | 750 kg | 2450 mm | 2200 mm | Volvo (welded hooks) | Min. 8 t |
| Valter 2500TKH | 605568 | 2500 l | 840 kg | 2600 mm | 2300 mm | Volvo (welded hooks) | Min. 9 t |
| Valter 3000TKH | 605569 | 3000 l | 1005 kg | 2840 mm | 2600 mm | Volvo (welded hooks) | Min. 10 t |
| Valter 3500TKH | 605570 | 3500 l | 1 160 kg | 3000 mm | 2800 mm | Volvo (welded hooks) | Min. 11 t |

* Weight without the coupler

SERCO
www.serco.fi

**JPT Serco Oy, Ristolantie 5, FI-27710 Köyliö, Finland, tel. +358 2 4808 7000, info@serco.fi**